



HEAVY DUTY HYDRAULIC SHEARS

MODEL SHOWN: HS-1065HD

MODEL		HS-0865HD	HS-08100HD	HS-1065HD	HS-10100HD
Cutting Capacity	Mild Steel	6.5 x 2540 mm 1/4" x 100"	10 x 2540 mm 3/8" x 100"	10 x 3100 mm 3/8" x 122"	6.5 x 4080 mm 1/4" x 160"
	Stainless Steel	4.5 x 2540 mm 8 GA. x 100"	6.5 x 2540 mm 1/4" x 100"	6.5 x 3100 mm 1/4" x 122"	4.5 x 4080 mm 8 GA. x 160"
Strokes Per Minute (SPM)		18	16	16	14
Hold Downs	Numbers	16	16	18	18
	Pressure (Metric Tons)	12 tons	24 tons	15 tons	29 tons
Front Supporter		1000 mm 39 3/8"	1000 mm 39 3/8"	1000 mm 39 3/8"	1000 mm 39 3/8"
NC servo back gauge		800 mm 31 1/2"	800 mm 31 1/2"	800 mm 31 1/2"	800 mm 31 1/2"
Top Blade	Blade	Automatic blade clearance adjustment			
	Rake Angle	Fixed Rake Angle			
Motor		20HP	25HP	20HP	25HP
Tank Capacity		200L 52 gal	300L 79 gal	200L 52 gal	300L 79 gal
Shipping Weight		12800 lbs	18750 lbs	13670 lbs	20950 lbs
Approx Size		145" x 752" x 85"	144" x 79" x 87"	167" x 752" x 85"	170" x 79" x 87"

All Specifications & design are subject to change without prior notice

Standard Equipment / Features

- 1 High grade, high carbon/chrome 2-edge upper blade and 4-edge bottom blade
- 2 Foot pedal with safety protection
- 3 Schneider 7" Touch Screen NC controller
- 4 Front Supporting arm with dual scale
- 5 Side Gauge with dual scale
- 6 NC servo motorized back gauge




HD Hydraulic Shears Features Cont.

- 7 Front feeding worktable with rollers
- 8 Full length finger guard
- 9 Hydraulic independent Hold-Downs
- 10 Overload protected hydraulic system
- 11 Automatic blade clearance adjustment
- 12 Full electrical cabinet with operation panel

OPTIONAL ACCESSORIES

- 1 CE conformity
- 2 Angle Gauge
- 3 Larger motor for faster stroke
- 4 Hydraulic or Pneumatic sheet supporter
- 5 Back Gauge with lifting function
- 6 Extended front supporting arm, length 1.5/2.0/3.0 meters
- 7 Extended side gauge, length 1.5/2.0/3.0 meters

HDH Standard Features

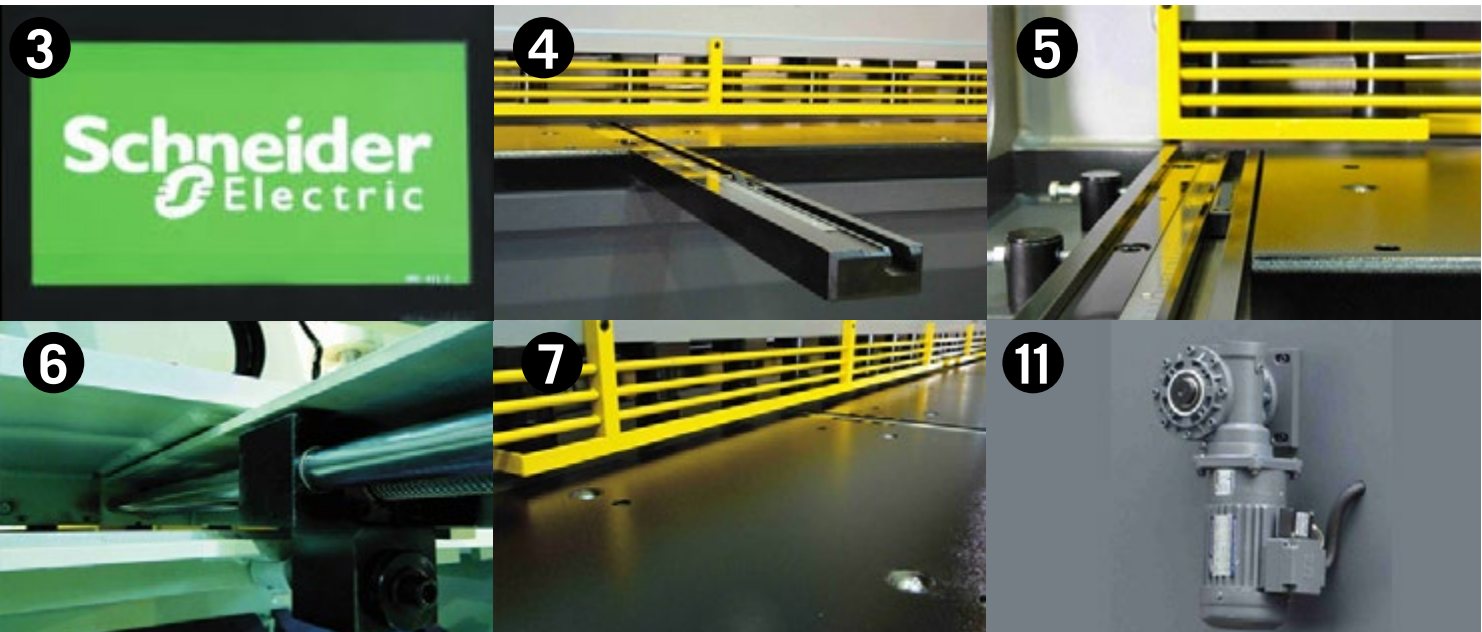

Coldworksequipment.com

COMMAND PERFORMANCE AND DURABILITY

Depend on Us Because COLDWORKS

ORDER NOW 903.663.8500

